





# Technical Parameters

<b>CCT</b>	5000K(3000K, 4000K, 5700K, 6500K Optional)						
<b>CRI</b>	>80Ra						
<b>Light Source</b>	Lumileds						
<b>System Watts</b>	100W	150W	200W	240W	300W	400W	500W
<b>Dimensions(mm)</b>	Φ260*H159.5mm			Φ320*H151.5mm	Φ320*H157.5mm	Φ360*H215mm	
<b>Input Voltage</b>	100-277V / 200-480V						
<b>Power Factor</b>	0.95						
<b>THD</b>	<15%						
<b>Driver</b>	MEAN WELL / Sosen / Lifud						
<b>Operating Temp Range</b>	-30°C to +50°C						
<b>IP Rating</b>	IP65						
<b>Dimming</b>	1-10V Dimming Control, Sensor Control, DALL Control, Zigbee Control, Occupancy Control						
<b>Life Span</b>	L70, >145,000 hours						
<b>Light Distribution Options</b>	120°, 80°, 50°					120°, 80°, 45°, 30°	
<b>Certification</b>	UL, DLC, FCC, TUV, CE, CB, RCM						


## Photometric Diagrams

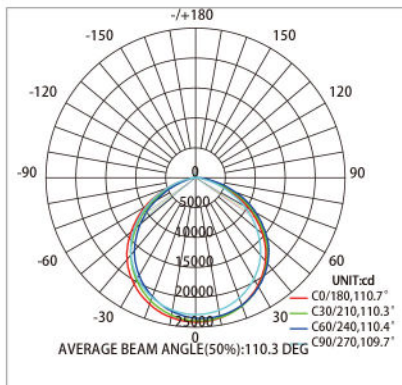


120deg

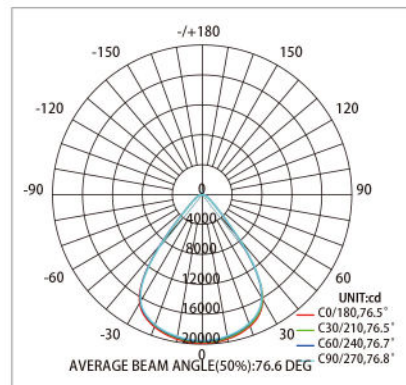

80deg

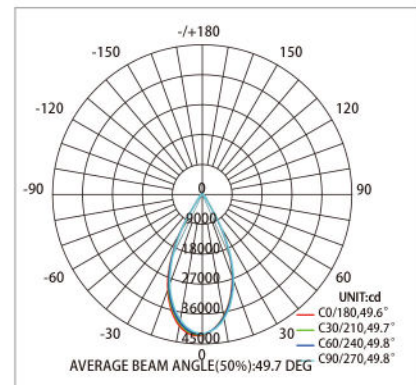

50deg

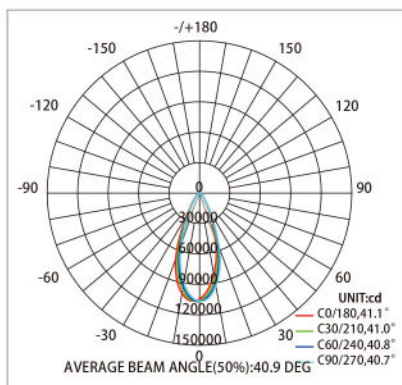

45deg