

LEDX.NO


LED expert AS
Torpumveien 543
1788 Halden

E-post: post@ledx.no
Tlf: 909 54 606

LED Street Light



160LM/W

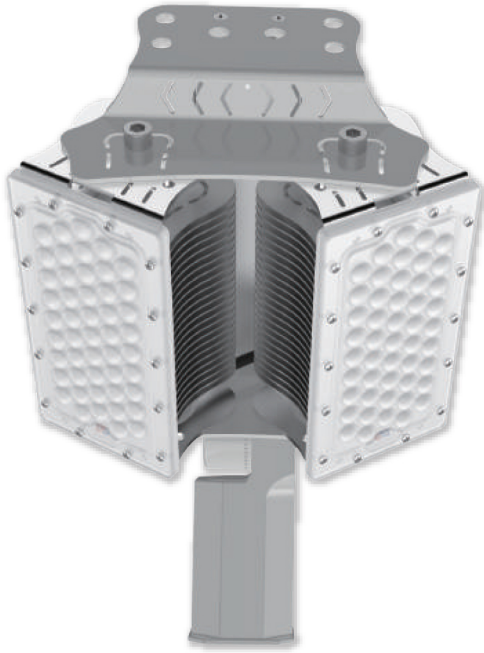

WATTAGE	120/180/200 /300/400W
LIGHT SOURCE	LUMILEDS
DRIVER	MEANWELL
LAMP LUMINOUS FLUX	160LM/W±5%
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	30°/60°/90°/120°
IP GRADE	IP65
HEAT-SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40°C~60°C
POLE SIZE	60mm

120W

19,200LM±5%
 4.4kg±5%
 48PCS LED
 478×220×169mm



200W

32,000LM±5%
 4.6kg±5%
 96PCS LED
 478×220×169mm

180W

28,800LM±5%
 5.5kg±5%
 72PCS LED
 478×338×169mm



300W

48,000LM±5%
 6.3kg±5%
 144PCS LED
 478×338×169mm






400W


64,000LM±5%
 7.8kg±5%
 192PCS LED
 670×220×205mm

Professional Light Distribution



Multiple optical lens choices are available with angles including 30°/60°/90°/120° to meet the requirements for professional light distribution and an extensive scope of applications.

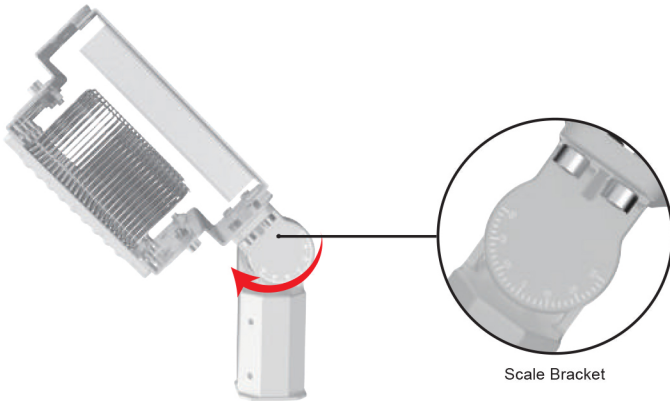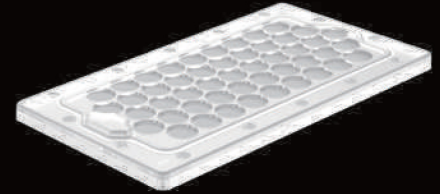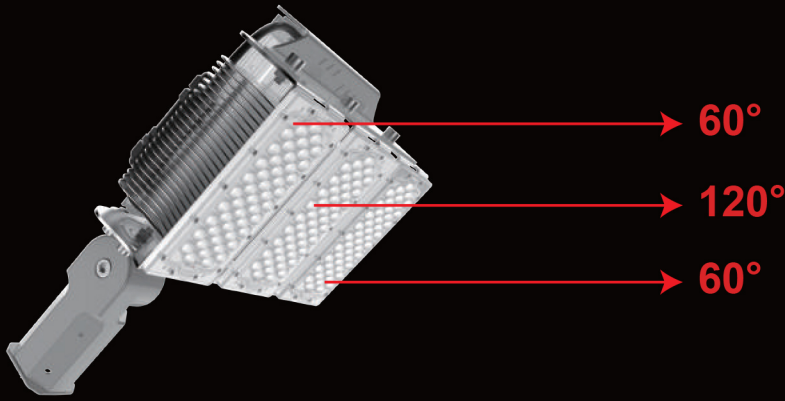

Arc bracket rotatable 180°

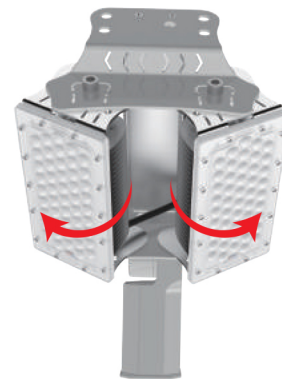

Module rotatable 90°

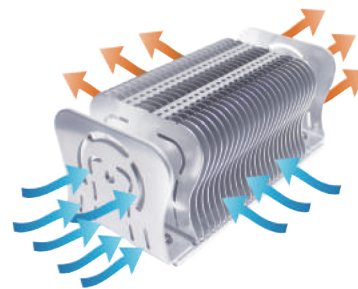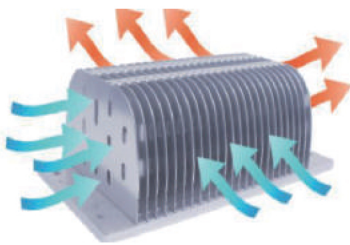


- Ultra Lightweight
- Highly Efficient Heat Dissipation
- Multiway Air Flow+ Aluminum Cooling Fin


Application



120/200W

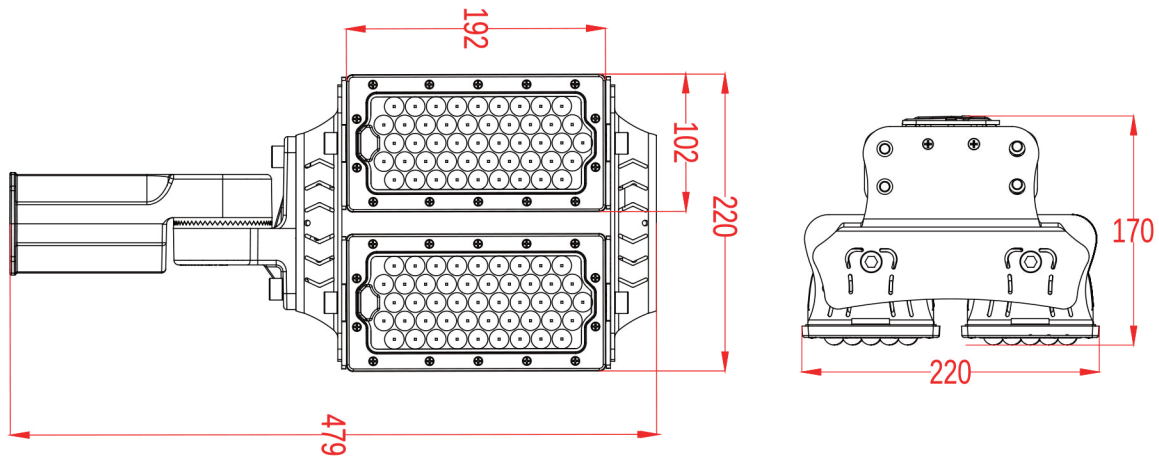

300W

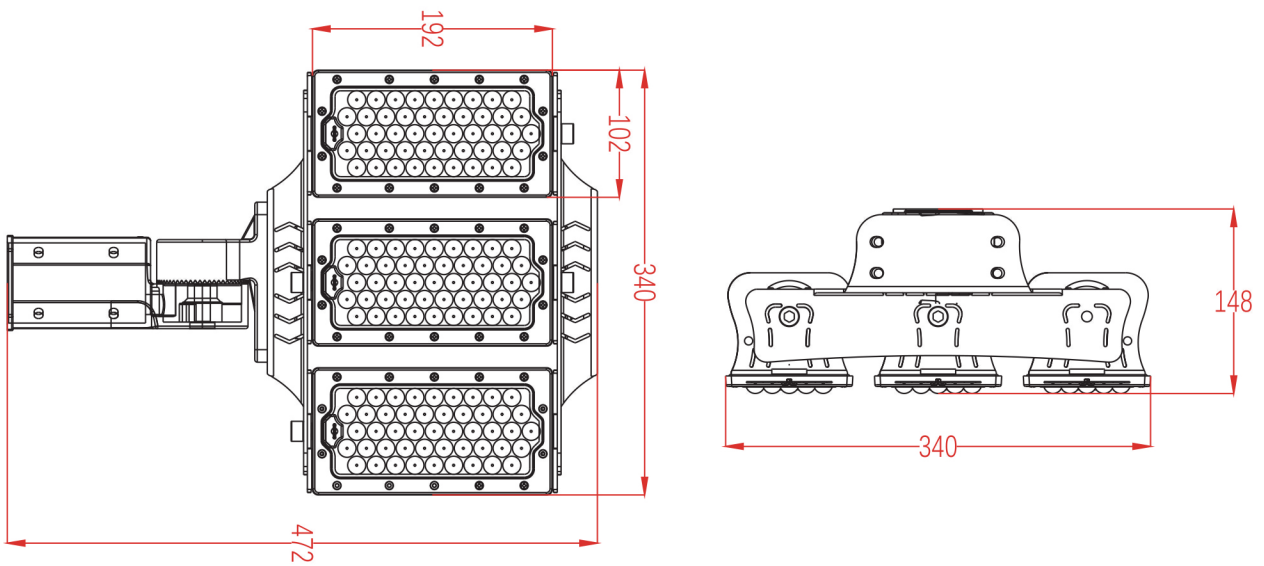

400W

