


Model U

Die cast aluminum body highly resistant
rated IP67 with a lifetime of 85.000 hours

- 350° Mast rotation
- Zinc-plating vertical mast with manual or hydraulic lifting system
- Perfect for a 20 kVA generator, space available 720x1600 mm, 960x1800 mm or 960x1950 mm depending on trailer
- 4 + 1 (wheels) adjustable stabilizers
- Reclining tow-bar for fast and easy storage/ shipment
- Road-tow trailer upon request

STRENGHTS

	WITHOUT ENGINE
	ANY GEN-SET 720X1600MM 960X1800MM 960X1950MM
	350°
	8,5 M HEIGHT 7 M HEIGHT

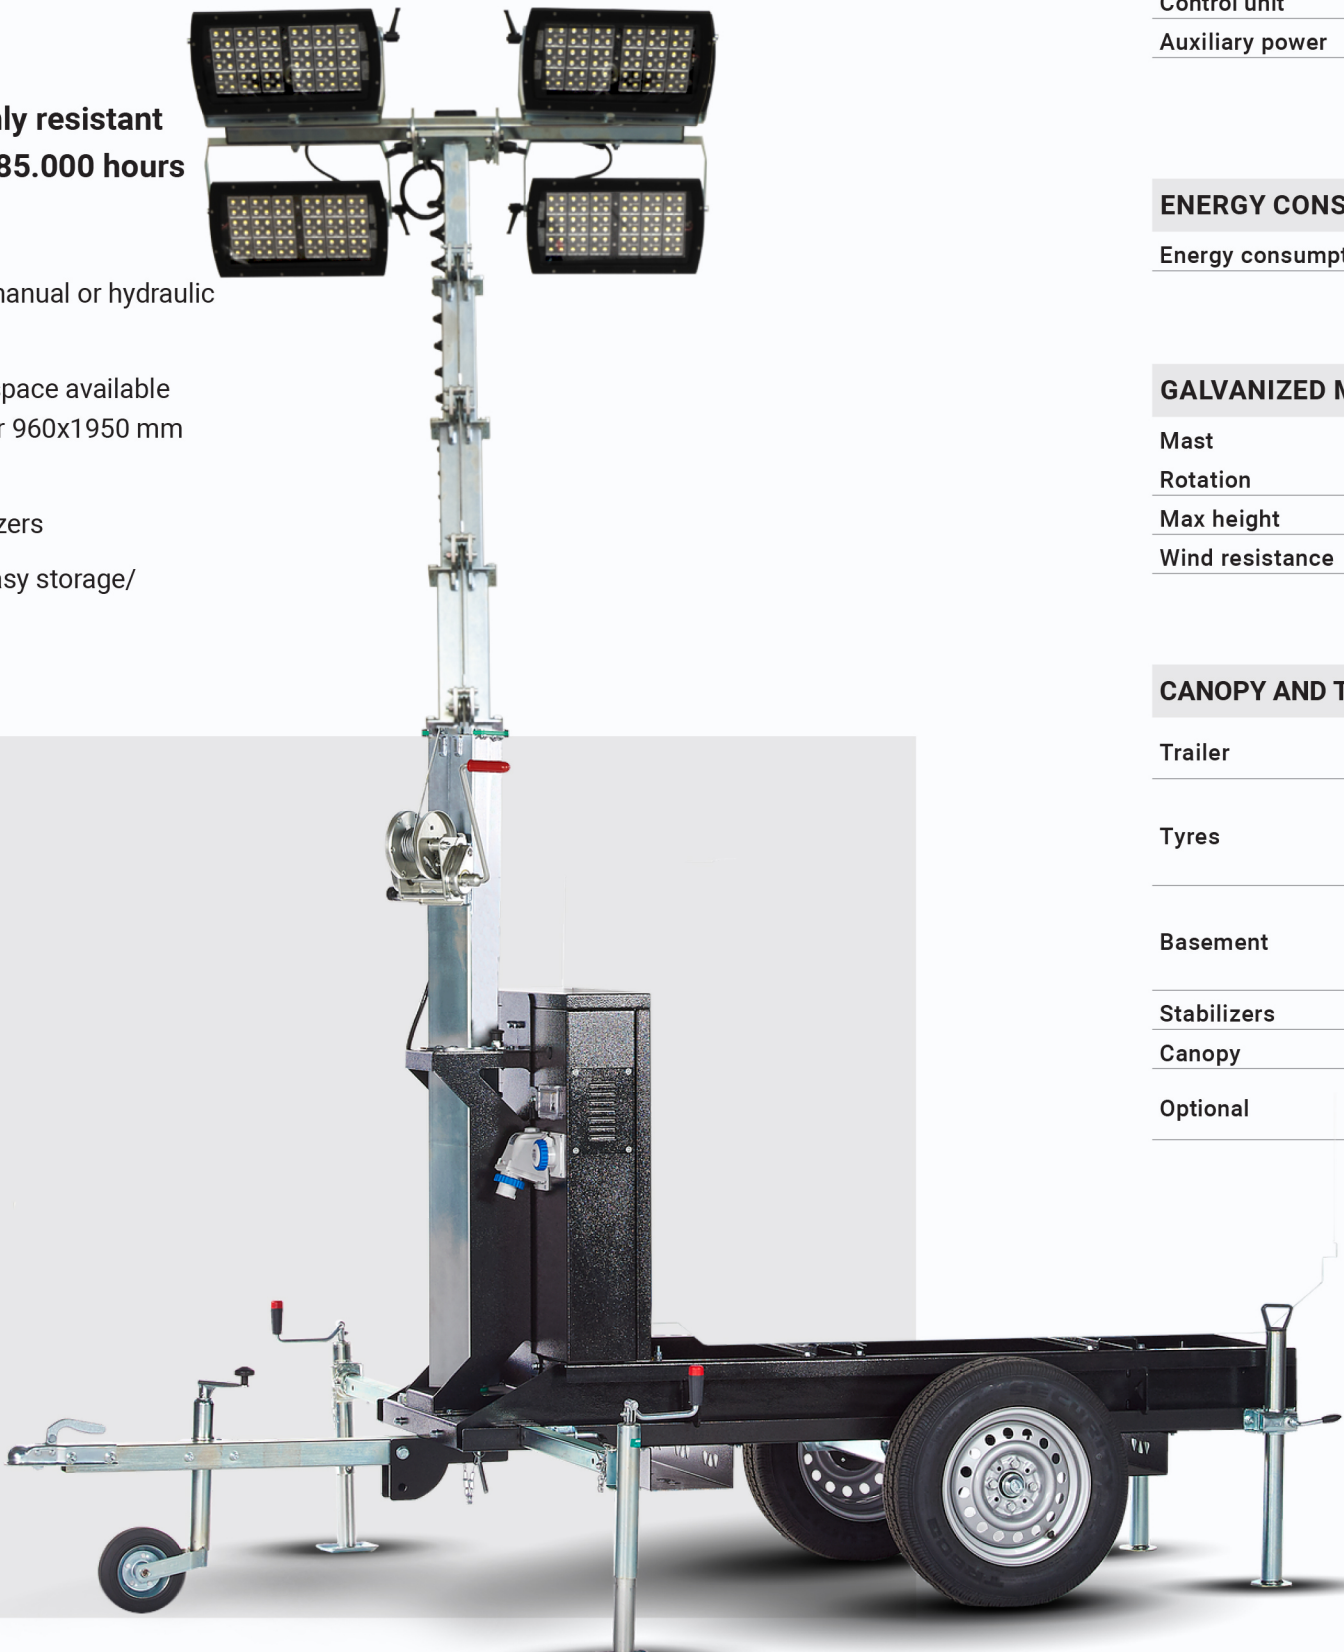

TECHNICAL SPECIFICATION

Rated Frequency	50 Hz
Rated Voltage	230 V
Rated Power	/
Operating temperature	-30/+50 °C
Sound level	0 dB
Control unit	/
Auxiliary power	/

ENERGY CONSUMPTION

Energy consumption	1,3 kW (4 lights on)
--------------------	----------------------

GALVANIZED MAST

Mast	Manual / Hydraulic
Rotation	350°
Max height	7-8,5 m
Wind resistance	110 km/h


CANOPY AND TRAILER

Trailer	Site-tow trailer Road-tow trailer
Tyres	155/80R13 185/70R13
Basement	Gen-set 720x1600 mm Gen-set 960x1800 mm Gen-set 960x1950 mm
Stabilizers	4 + 1
Canopy	Powder coating paint
Optional	Adjustable road-tow trailer


LIGHTING AREA

FLOODLIGHT	LUMEN	LIGHT COVERAGE
4X320 W MultiLED	166200 lm	4300/5000 mq

DIMENSIONS & SHIPMENT

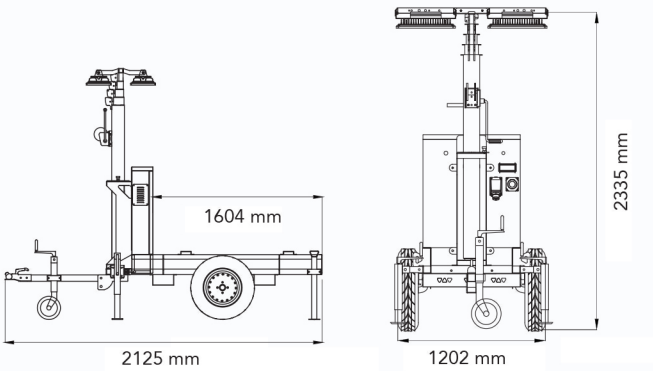

213 x 120 x 240 cm
340 kg

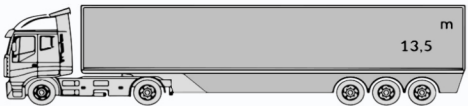

10 UNIT
(Ready to use)