



LEDX.NO

LED expert AS
Torpumveien 543
1788 Halden

E-post: post@ledx.no
Tlf: 909 54 606

PERFORMANCE



Philips Lumileds



3000K,4000K,5000K



≥70



L70>120,000 Hours



100-277 VAC, 100-347 VAC, 277-480 VAC



0.95 min



IP66



IK10



Corrosive resistant polyester powder coat finish



Operating Temperature:-45°C to +50°C (-49°F to 122°F)
Storing Temperature:-45°C to +80°C (-49°F to 176°F)




15% to 95% RH




SPECIFICATIONS

CCT	Power	Efficacy(lES)	Total Lumen	N.W	CRI	LED Chip	Product Dimensions
3000K	80W	155LPW	12,400lm	2.6kg/5.7lbs	≥70	Philips Lumileds	280×280×169mm 11×11×6.7in
	100W	150LPW	15,000lm				
	150W	145LPW	21,750lm				
4000K	80W	175LPW	14,000lm				
	100W	170LPW	17,000lm				
	150W	165LPW	24,750lm				
5000K	80W	160LPW	12,800lm				
	100W	155LPW	15,500lm				
	150W	150LPW	22,500lm				
3000K	150W	145LPW	21,700lm	2.6kg/5.7lbs	≥70	Philips Lumileds	280×280×169mm 11×11×6.7in
	180W	142LPW	25,560lm				
	200W	140LPW	28,000lm				
4000K	150W	165LPW	15,500lm				
	180W	162LPW	29,160lm				
	200W	160LPW	32,000lm				
5000K	150W	150LPW	22,500lm				
	180W	147LPW	26,460lm				
	200W	145LPW	29,000lm				

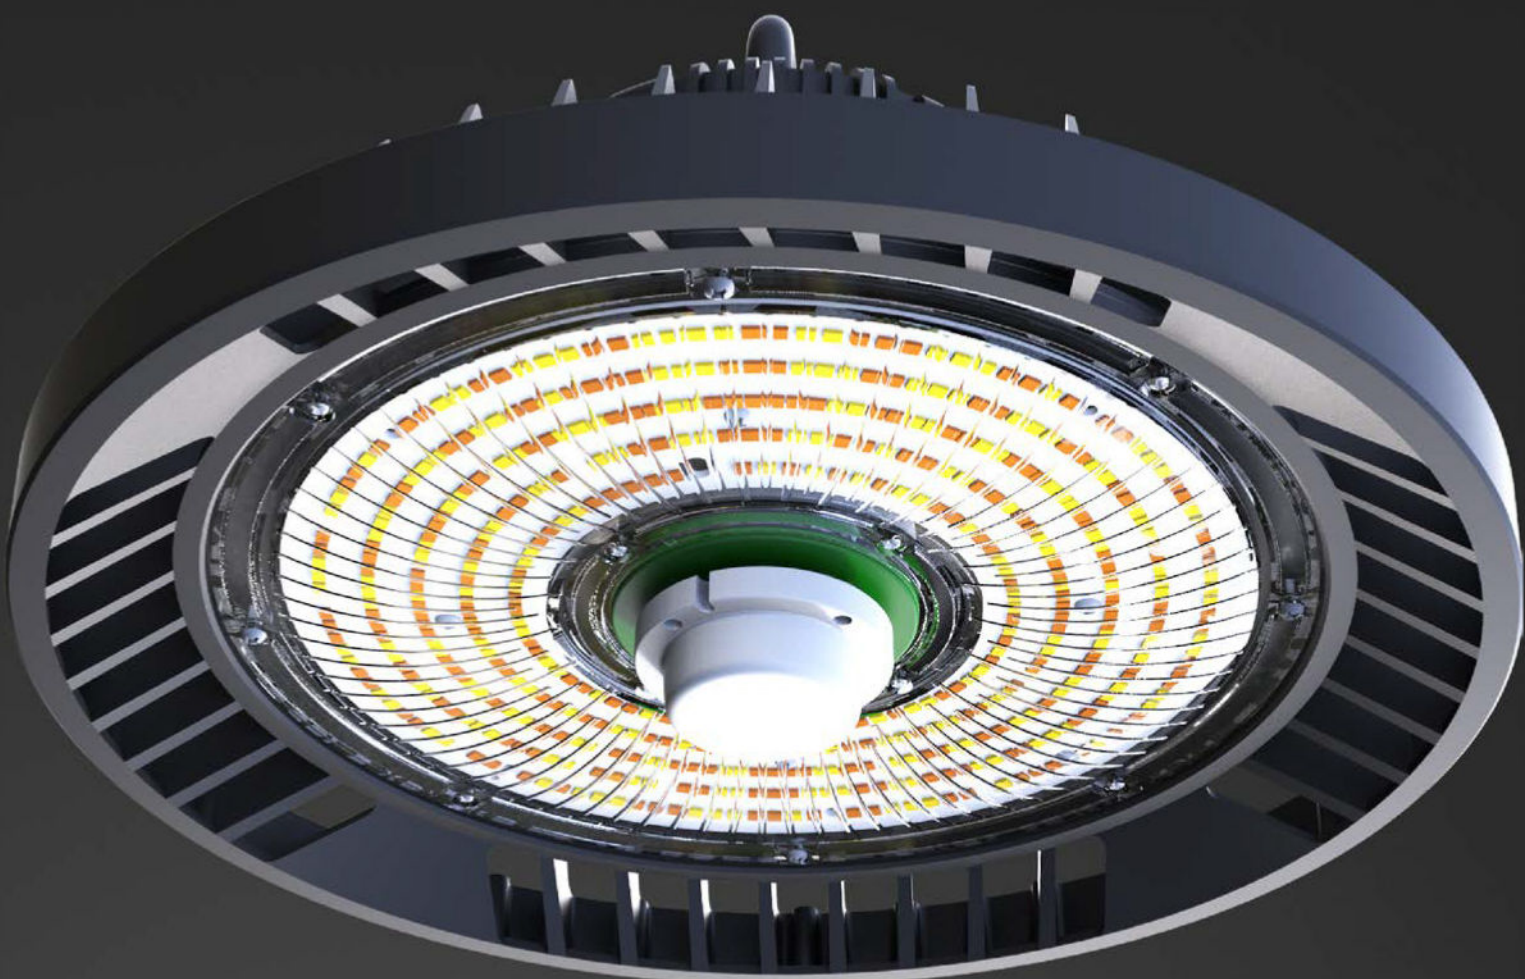


PHOTOMETRICS


60° Ribbed Lens

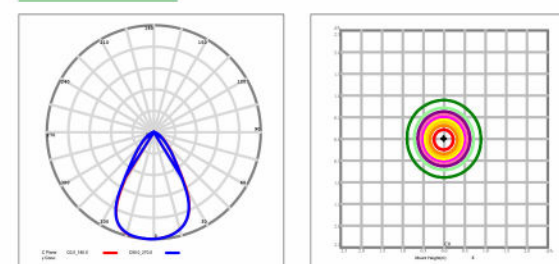

90° Ribbed Lens

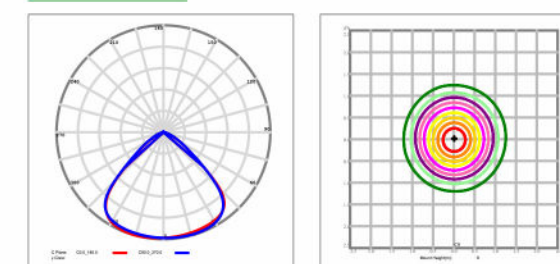

120° Diffused Dome Lens

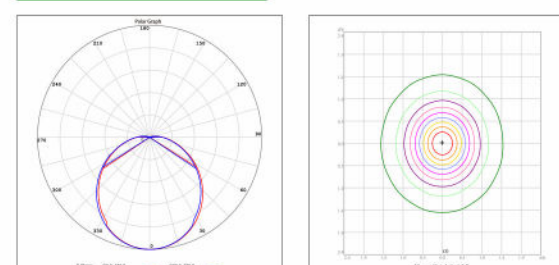

90° Reflector

