




The tube light with 360° illumination, is ideal for working in explosion-proof areas. Thanks to the optionally available accessories, the 360° light is suitable for permanent or temporary installation.

- Illuminant: 18 POWER LEDs / 6500 K / 360° light
- Protection tube: polycarbonate, shock-resistant, 50 mm Ø
- Diffusorfoil integrated
- Handle / end cap: neoprene, black
- Metal hook: yes, plastified, rotatable
- Protection category: IP68 -50 m / 5 h
- Protection class: III
- Cable: 10 m H07RN-F 2 x 1,00 mm²
- Voltage: 24 V

number LED	volt	ampere	lumen	protection class	protective tube	IP	cable	plug	EEC
18	24 V AC/DC	0,33	1000 lm	II	Polycarbonat	IP68	10 m H07RN-F	ohne w/o	

Dimensions

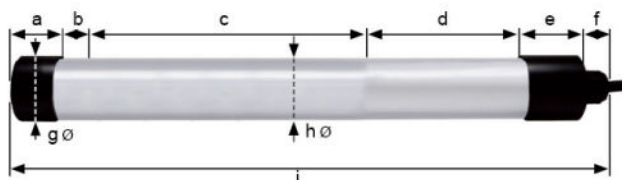

Dimensions in mm

a	b	c	d	e	f	g	h	i
35	45	225	175	45	20	53	50	525

Weight: ca. 1,5kg



ATEX Identification

ATEX-Nr.: TÜV 18 ATEX 8191 X

II 2 G Ex eb mb op is IIC T4 Gb

II 2 D Ex tb op is IIIC T105° Db IP68

Gerätegruppe / Device group:

Kategorie / Category:

Gefahrenzone / Hazard zone:

Temperaturklasse / Temperature class:

T_{amb}:

II

2G / 2D

1,2 / 21, 22

T4

-20°C - +40°C