


10-second rapid expansion, easy adjustment of four lighting angles.





Original petal-shaped adjustable head offers 360-degree wide-angle illumination, from all directions to directly below the light.


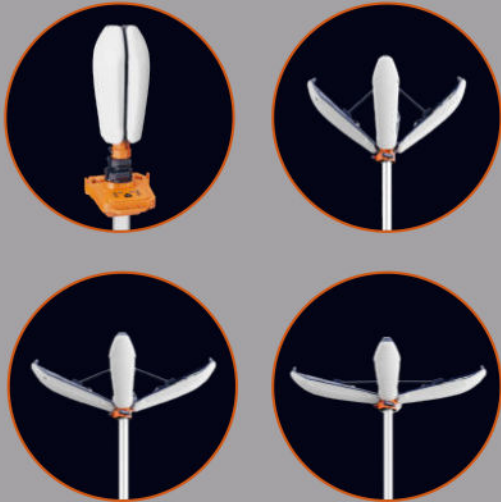


One-click release or lock of the legs.

Ground pegs are available to secure the light tower, providing wind and vibration resistance. (Optional)

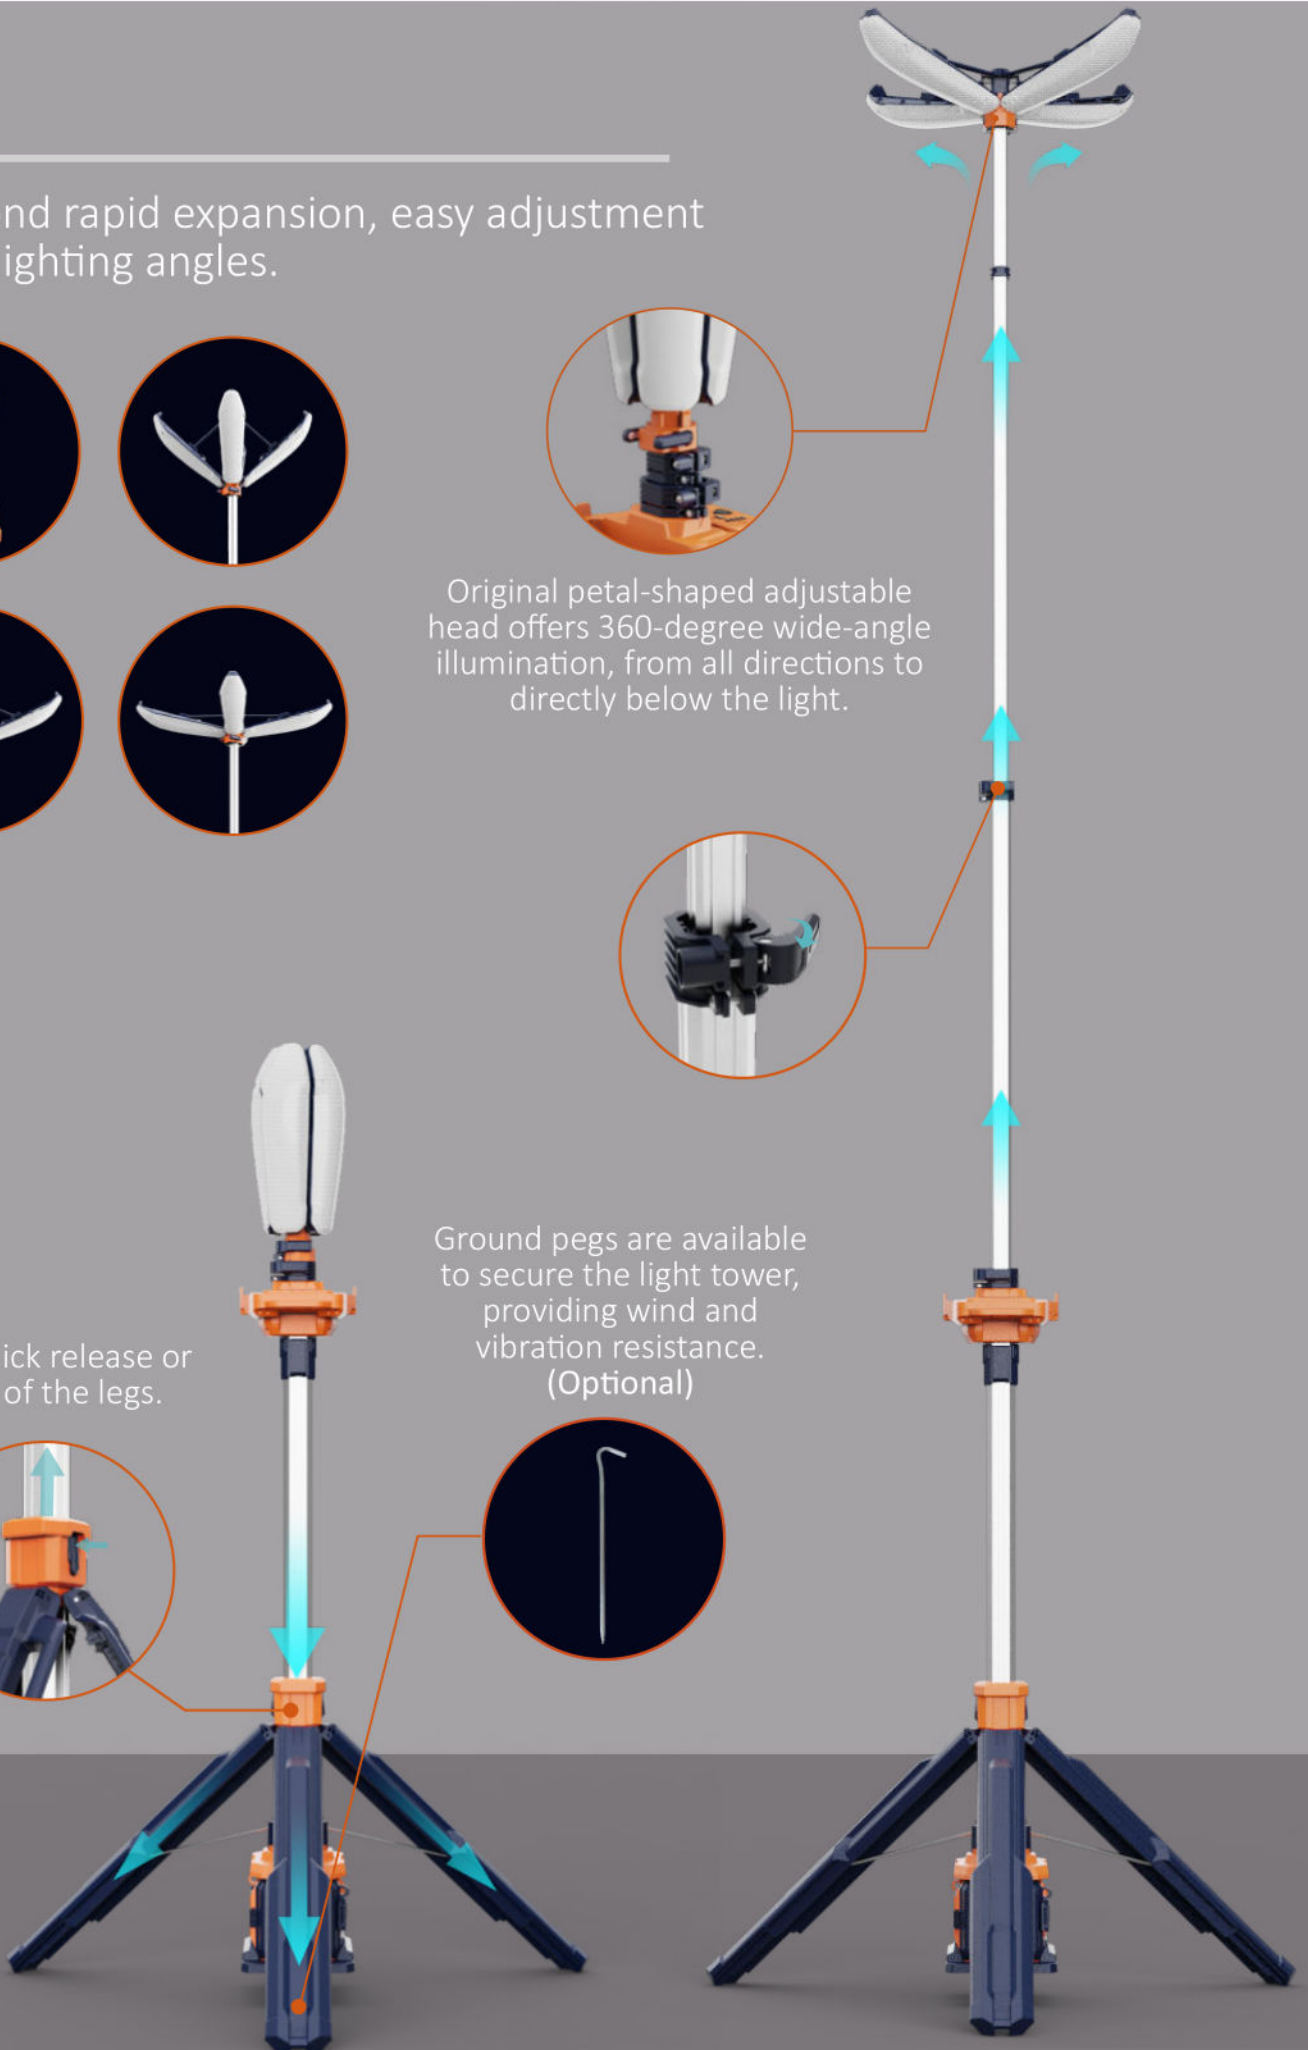

HUMANIZED DESIGN HIDDEN IN THE DETAILS

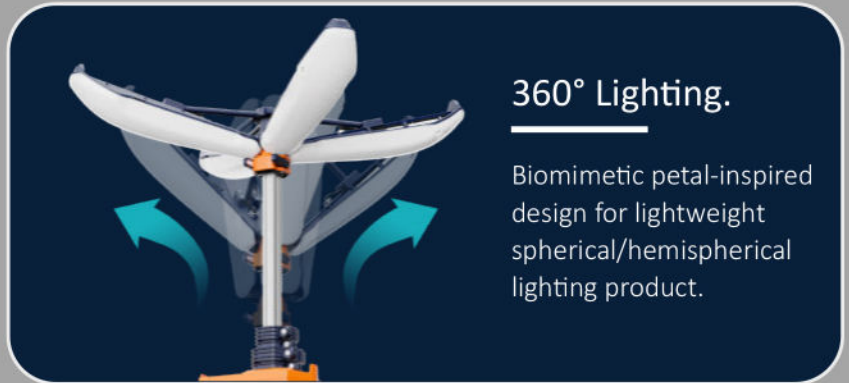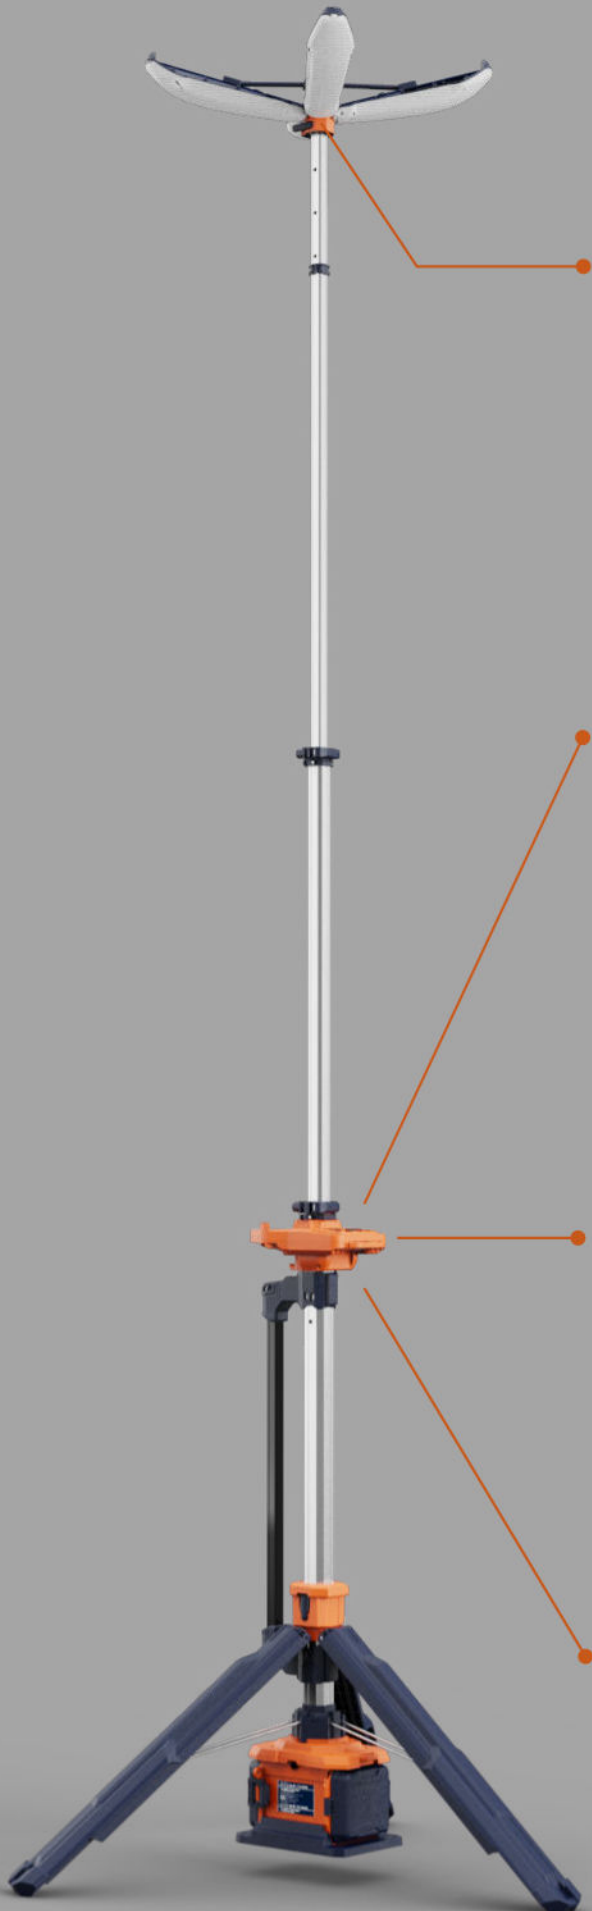


360° Lighting.

Biomimetic petal-inspired design for lightweight spherical/hemispherical lighting product.



USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.

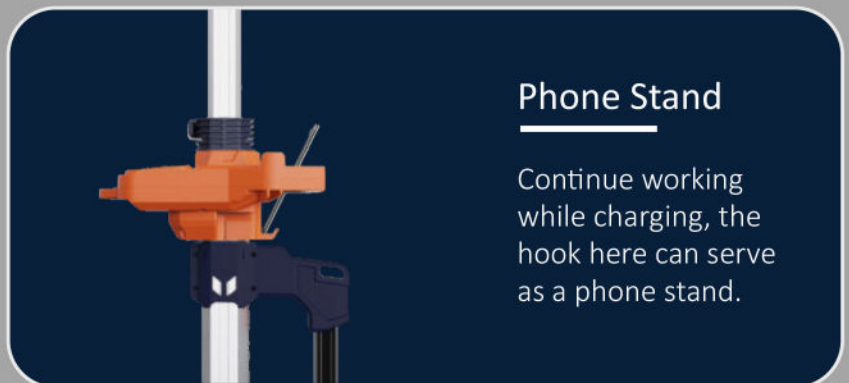

Phone Stand

Continue working while charging, the hook here can serve as a phone stand.



Stepless Dimming

Plug the driver into the rainproof port to unlock maximum brightness and stepless dimming.

LOWER CENTER OF GRAVITY, GREATER STABILITY

Ultra-low center of gravity combined with extended legs effortlessly handles strong winds.



Ultra-long working hours

Standard Mode Up To **13+** Hours
(D24-100 x 2)

Battery compartment fits two replaceable battery packs.



2 types of battery packs with different capacities have same contact slot.




D24-54 x 2



D24-100 x 2


Typical working hours 36+

Doubled typical working hours to 71+ hours.

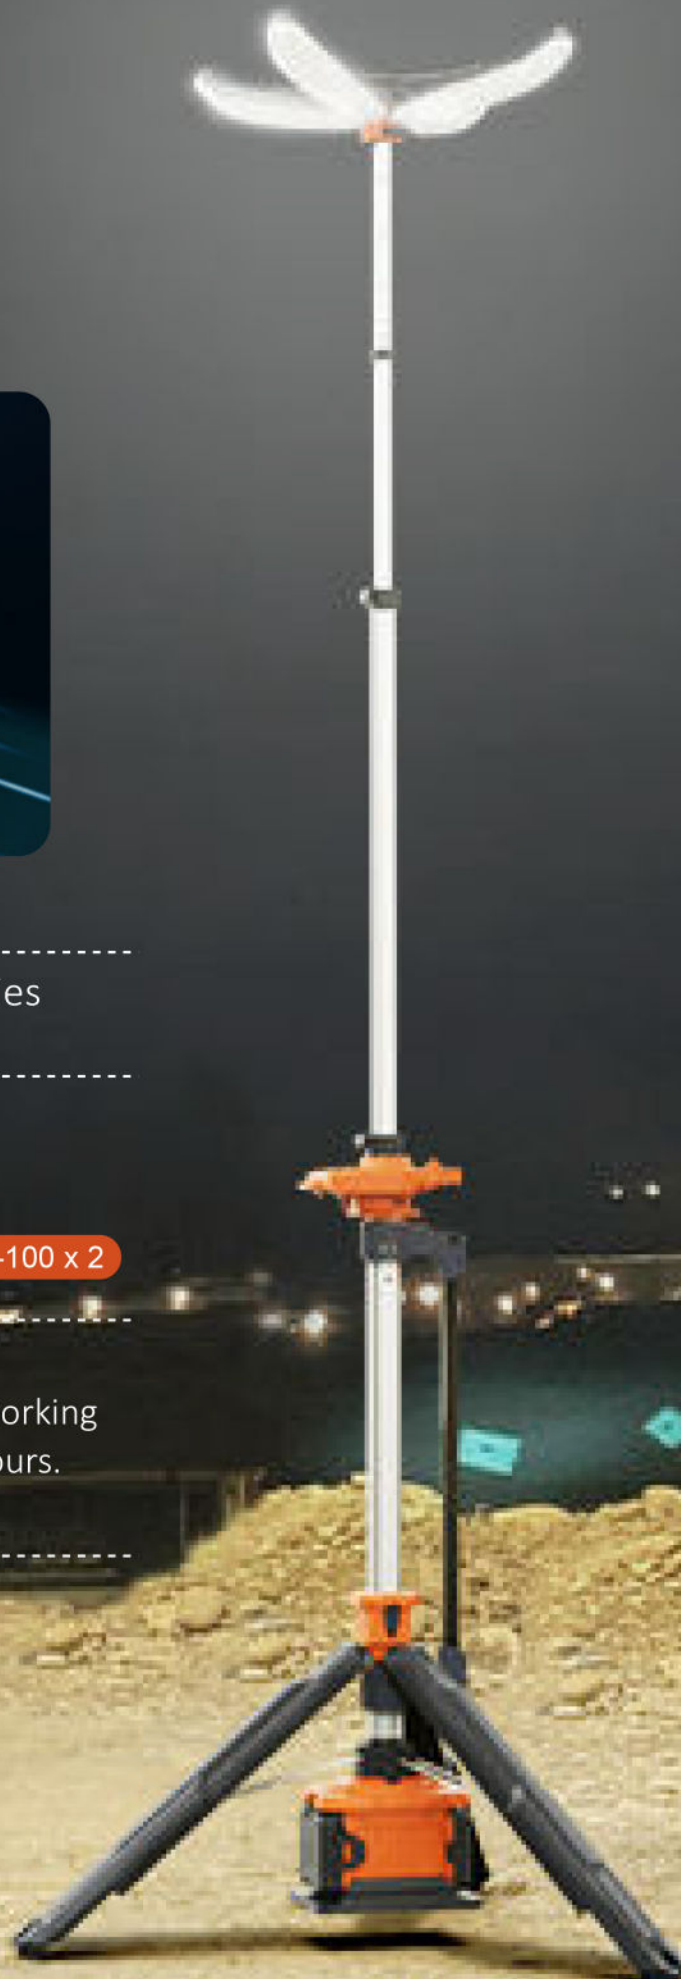

Uniform and non-glaring 360-degree illumination, leaving no dark spots.

- Lighting Area 2200 m²

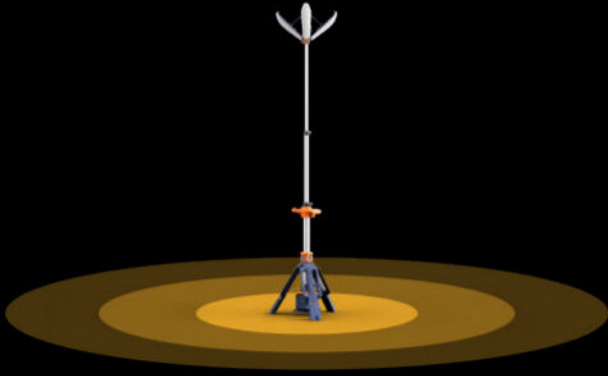

AC Powered

Up To **14,000** LM


Battery-powered

Up To **8,000** LM

Stepless Dimmable (AC Powered)



4 levels of Brightness (Battery Powered)

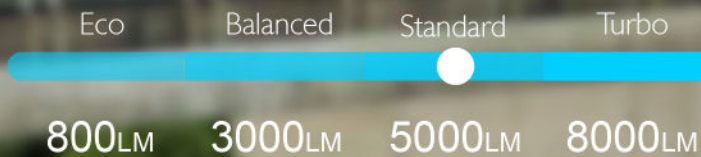



Construction



Maintenance



Rescue



Emergency



Railway



Mining



Camping



Sport

Designed for single-person operation

Easy to grip and move,
weight 8.8 kg excluding battery pack.



1.58m



3.4m




Specifications

Height	1.58m~3.4m
Weight	8.8Kg (Fitting only)
Power Supply	D24 series battery pack / AC 100-277V
Lumens	0 - 14,000Lm
Run Times	> 13 hours (Standard mode, D24-100 x 2)
IP Grade	IP66
Output(USB)	5V 2A (2 Dock)



Size (mm)

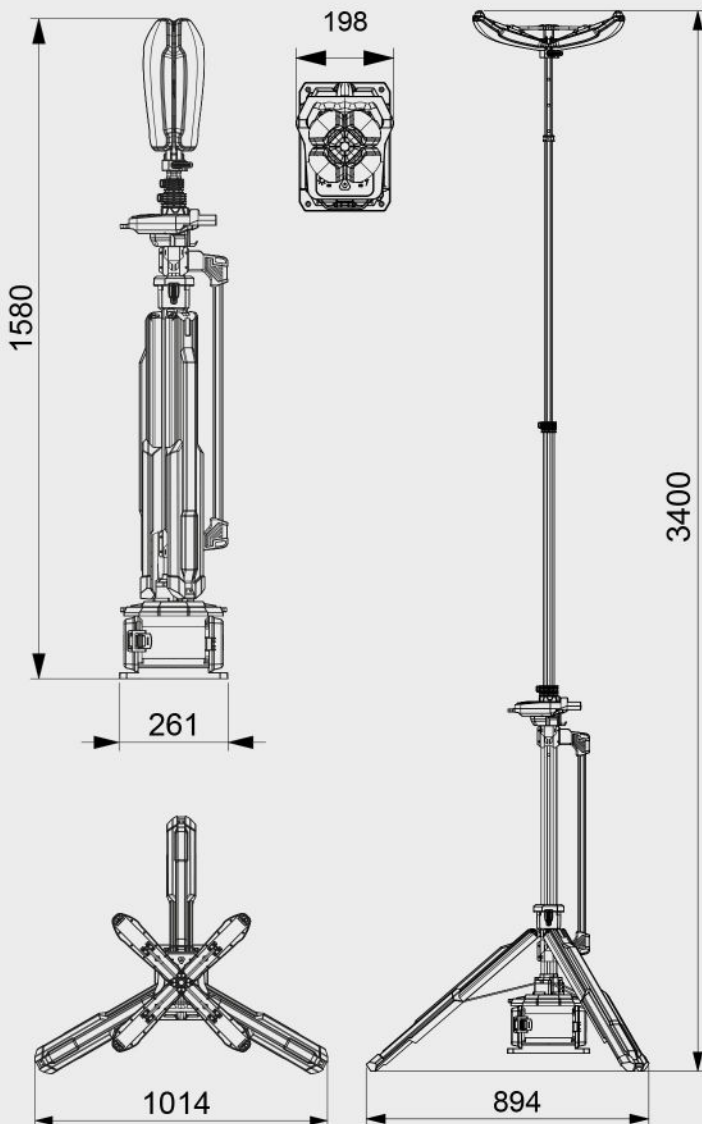

Package

Size of Carton	1660x280x390mm
Gross Weight of Carton	13KG
PCS/Carton	1

