

# SPEEDY DEPLOYMENT

---

## MULTIPLE LIGHTING DISTRIBUTION




### Single latch to release tripod

Deploy or fold in seconds.



## Self-locking Pole

Drag & Lock at any position, contraction in one push.





Press down to fold the pole



# Ultra-long Endurance

Standard Mode Up To **20+** Hours  
(3xD24-100)


## Control Board

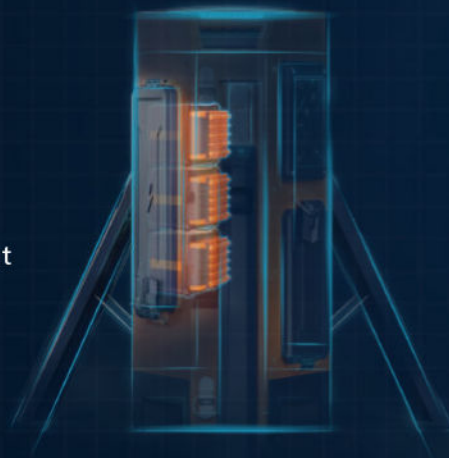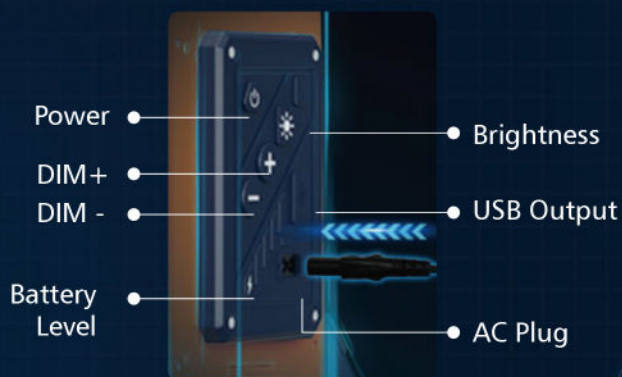


## Application




Emergency




Infrastructure




Railway



Event



Maintenance



Mining



Sport




Construction



AC Powered  
Up To **17,000** LM

Battery-powered  
Up To **10,000** LM

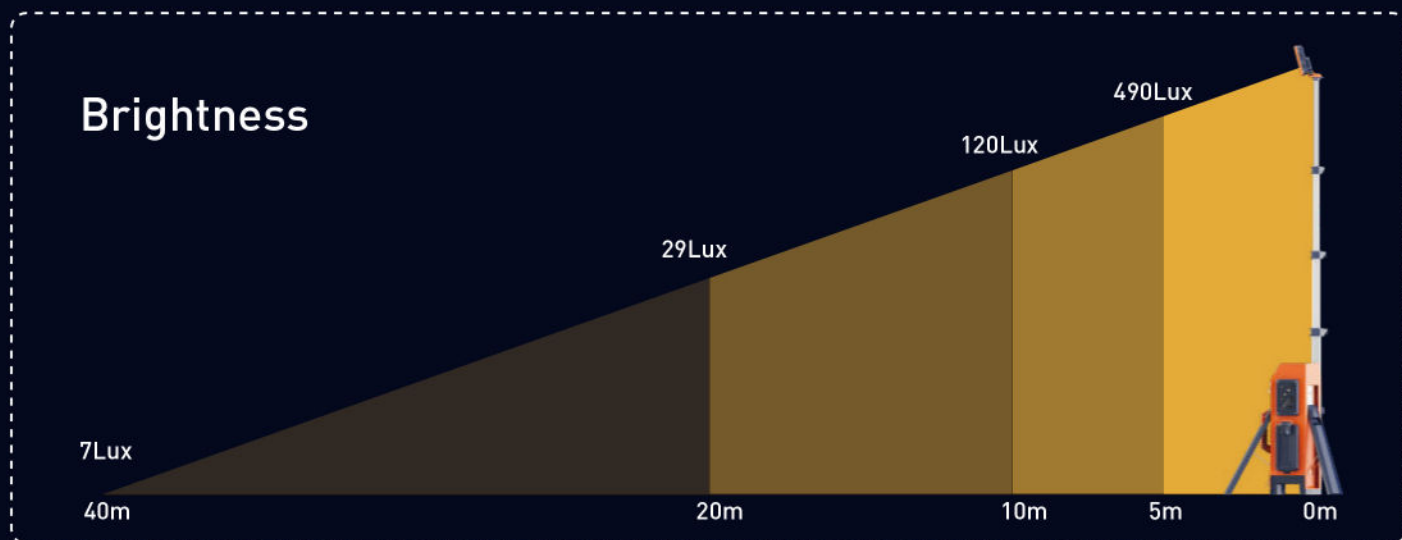

\* 'Brightness' represents the center point illuminance value of the lighting direction.

| AC                  | 0-17,000LM<br>Stepless Dimmable |          |
|---------------------|---------------------------------|----------|
| Battery<br>(4 Mode) | Turbo                           | 10,000LM |
|                     | Standard                        | 6,300LM  |
|                     | Balanced                        | 3,800LM  |
|                     | Eco                             | 1,000LM  |



**Lighting Area**  
1100m<sup>2</sup>

\* 'Lighting Area' represents the total lighting area of which > 1lux.

## One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.



Dual handle & strap available, 10Kg.





# Specifications

|                |                                    |
|----------------|------------------------------------|
| Hight          | 64.5cm~220cm                       |
| Weight         | 10Kg (Fitting only)                |
| Power Supply   | Battery / AC 100-277V              |
| Lumens         | 0 - 17,000Lm                       |
| Run Times      | >20 hours (Standard mode, D24-100) |
| IP Grade       | IP65                               |
| Output(USB)    | 5V 2A (2 Dock)                     |
| Battery System | D24-100                            |

## Battery (D24-100)

|                    |         |
|--------------------|---------|
| Rated Power        | 98Wh    |
| Rated Voltage      | 24.5V   |
| Rated Capacity     | 4.0Ah   |
| Working Temperture | -10~50℃ |
| Working Humidity   | 1~98%   |

## Size (mm)

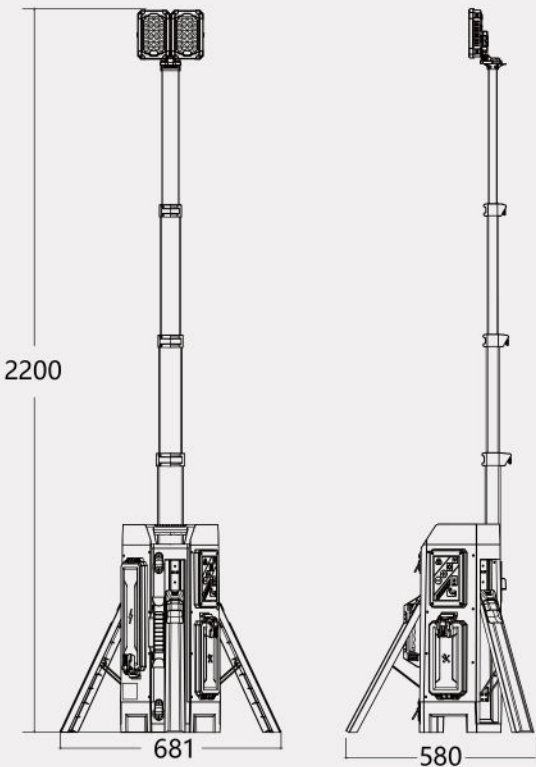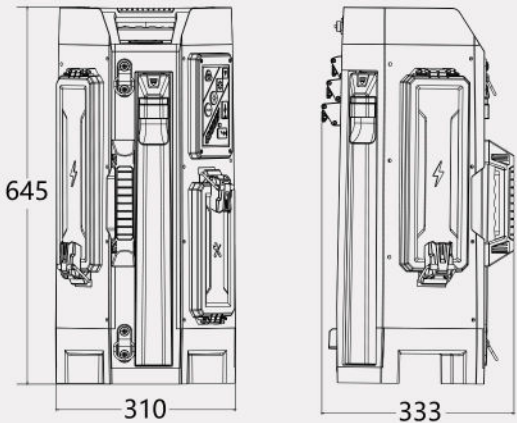

## Package

| Size of Carton | Gross Weight of Carton | PCS/Carton |
|----------------|------------------------|------------|
| 730x390x410mm  | 13.3kg±5%              | 1          |

