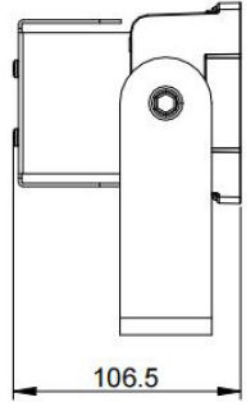
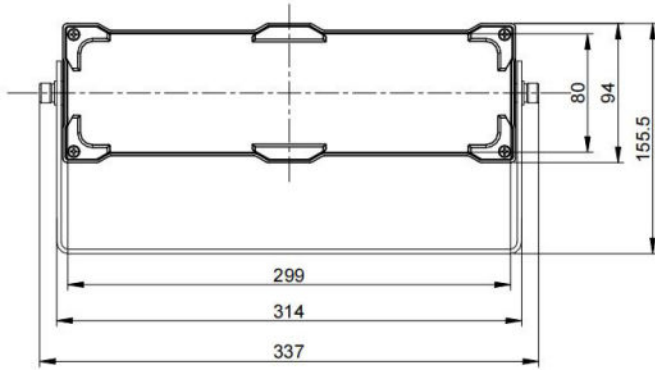


LEDX.NO

LED expert AS  
Torpumveien 543  
1788 HaldenE-post: post@ledx.no  
Tlf: 909 54 606

|                                  |  |                       |            |
|----------------------------------|--|-----------------------|------------|
| Power:                           | 75W  |                       |            |
| Working voltage:                 | AC90-305V, 50/60Hz, 0.35A(at 230v)                                   |                       |            |
| PF:                              | > 0.95   |                       |            |
| IP/IK Grade:                     | IP67, IK09   |                       |            |
| THD:                             | <10% (at 230v, 50Hz)   |                       |            |
| Surge protection:                | L/N-PE: 10KV, L-N: 6KV; 20KV version is for option.                  |                       |            |
| <b>TECHNICAL CHARACTERISTICS</b> |  |                       |            |
| Color:                           | Warm White   | Natural White         | Cool White |
| Color Temperature:               | 2700-3200K   | 4000-4500K/5000-5500K | 5700-6500K |
| CRI:                             | >70Ra/80Ra   | >70Ra/80Ra            | >70Ra/80Ra |
| Light Efficiency:                | 140-160lm/w  |                       |            |
| View angle:                      | 20°,30°, 45°, 60°, 90°,120°,60x120°, 90x120°, Type 2, Type 3, Type 4 |                       |            |
| <b>CONFIGURATIONS</b>            |  |                       |            |
| LED chip:                        | 3030 SMD   |                       |            |
| Materials:                       | Die casting aluminum ADC12, PC lens+tempering glass                  |                       |            |
| Body color:                      | Grey   |                       |            |
| <b>OTHERS</b>                    |  |                       |            |
| Operating Temperature:           | -35°C - 45°C   |                       |            |
| Operating Humidity:              | 10% - 90% RH   |                       |            |
| Net W./Gross W.:                 | 6.00KGS / 6.60KGS(two piece)   |                       |            |
| Packing size:                    | 37x18x28CM, two piece in one carton                                  |                       |            |
| Warranty:                        | 7 years  |                       |            |
| Certificates:                    | CE,CB, TUV ENEC, RoHS, SAA, LM79, LM80, TM21                         |                       |            |

**(mm)**

Brown/Black: Live Wire(L)

L  Brown

Blue/White: Neutral Wire(N)

N  Blue

Yellow/Green: Ground Wire(G)

  Yellow**The Ground Wire must be connected correctly!****Warning:**

- A. Before installation or wiring the lamps, please make sure the power is switched off;
- B. Before cleaning or repairing the lamp, please make sure the power is switched off;
- c. The lamp body will be very hot while working, do not touch it with your hand.